

# Standard Lever Designs





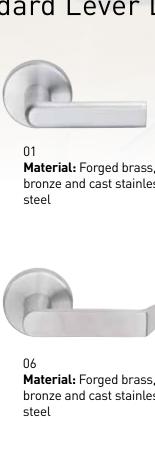




All 16 of the Standard levers can be paired with any of these commercial graded products for suiting across an office, a floor or an entire building.

- Schlage L-Series Mortise
- Schlage LT-Series Tubular available April 2014
- Von Duprin 98/99 Exit Devices
- Von Duprin 33A/35A Exit Devices
- Von Duprin 94/95 Exit Devices



bronze and cast stainless Ł











steel

Material: Forged brass, bronze and cast stainless Ġ steel




Material: Forged brass, bronze and cast stainless steel



Ġ



ASTI (AST) Material: Forged brass










St. Annes (STA) Material: Forged brass



Ġ

## Finish Key\*



605 **Bright Brass** 



606 Satin Brass



609 **Antique Brass** 



612 Satin Bronze



613 Oil Rubbed Bronze



619 Satin Nickel



625



Bright Chromium Plated



626 Satin Chromium Plated



629



Bright Stainless Steel



Satin Stainless Steel



643e Aged Bronze




Material: Forged brass, bronze and cast stainless steel



Ġ

# danmark Lever Designs

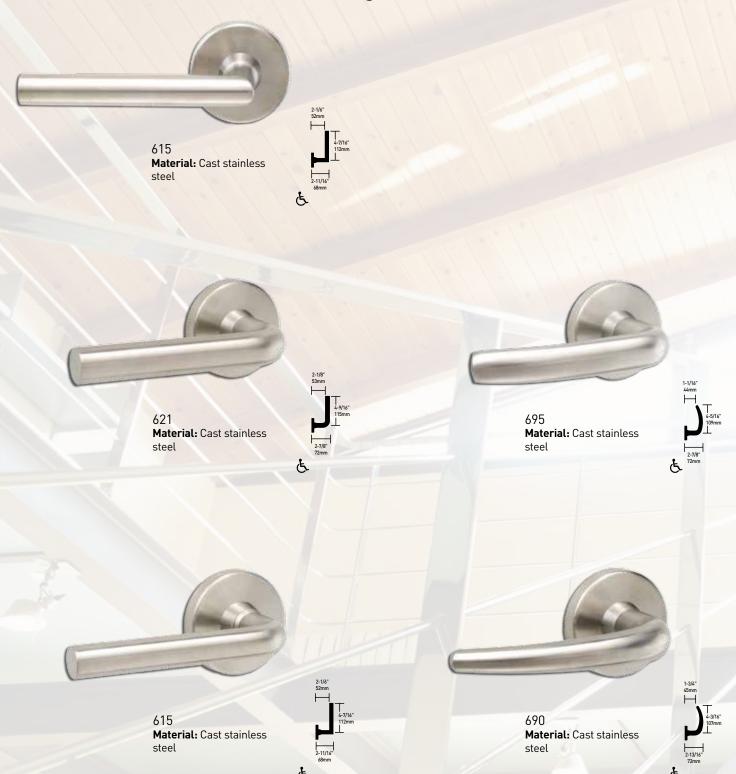



## Escutcheons and Roses

Choose from three types of escutcheon and two rose sizes to add tough, durable performance to your lockset.

#### **Escutcheons**



L Full Face

**Material:** Cold-forged brass, bronze or stainless steel **Finishes:** 605, 606, 609, 612, 613, 619, 625, 626, 629, 630,

643e

**Size:** 8" x 1 3/4" x 7/16" (203 mm x 44 mm x 11mm)

#### Roses



A Wrought Rose 2 1/8" (54 mm) diameter Available for use on L-Series knob and lever designs. Order by letter designation corresponding to the design and diameter desired.

**Finishes:** 605, 606, 609, 612, 613, 619, 625, 626, 629, 630,

643e



L Concealed

Material: Cold-forged brass, bronze or stainless steel Finishes: 605, 606, 609, 612,

613, 619, 625, 626, 629, 630,

643e

**Size:** 8" x 1 3/4" x 7/16" (203 mm x 44 mm x 11 mm)





B Wrought Rose

2 9/16" (65 mm) diameter Available for use on L-Series knob and lever designs. Order by letter designation corresponding to the design and diameter desired.

**Finishes:** 605, 606, 609, 612, 613, 619, 625, 626, 629, 630,

643e



N Escutcheon

**Material:** Heavy wrought reinforced brass, bronze or stainless steel

**Finishes:** 605, 606, 609, 612, 613, 619, 625, 626, 629, 630,

643e

**Size:** 8" x 2 <sup>9</sup>/16" x <sup>7</sup>/16" (203 mm x 65 mm x 11 mm)



# **Thumbturns**

Choose from three variations of thumbturn locks that help you meet the demands of specialized commercial projects.



Hotel Occupancy Indicator 09-611

For lock function L9486P, this unit can be used with A or B roses. Requires a 13/8" (35 mm) cylinder for 13/4" (44 mm) doors. Specify finish when ordering separately.




Optional EZ Turn L583-363

Available for rose and escutcheon trim. Disability turn (ADA) option to standard thumbturn. Can be used with thumbturn-function L-Series lock except L9463 and L463. Specify lock per L583-363 when ordering.



Coin Turn

For lock functions L9044 and L9444 with rose trim. Specify 09-509 and finish per L283-124 when ordering.




Products featuring a knurled surface will be indicated by adding the prefix "8" to the lever number. For example, L9050P 803A/03A.


### Tactile Warning (Knurling)

Schlage L-Series commercial levers feature knurling only on the outside lever unless otherwise specified. This feature is available on the following lever models: 01, 02, 03, 05, 06, 07, 12, 17, 18, 41, 42 and 93.

# Lock Functions

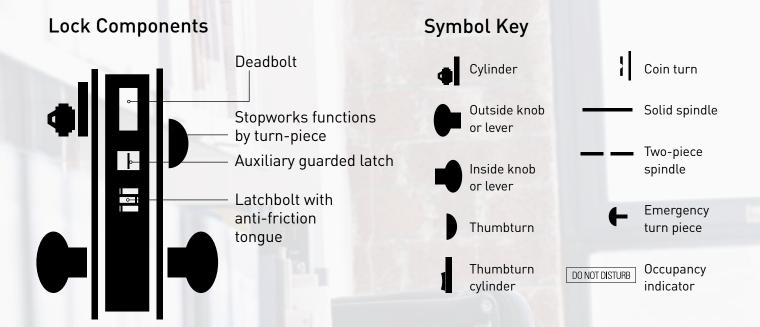

#### **Product Identification Guide**

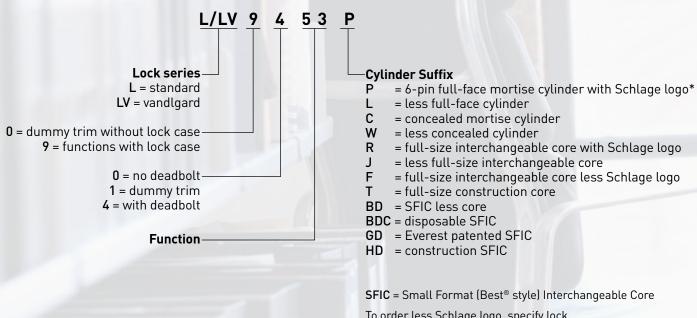

To order less Schlage logo, specify lock "with K510-612 faceplate."

LV = Vandlgard® function allows exterior lever to rotate freely down while remaining securely locked.

## Lock Functions | ANSI A156.13, Series 1000

Schlage ANSI



L9010 F01 Passage Latch

Latchbolt retracted by knob/lever from either side at all times. Inside lever is always free for immediate egress.



L9040 F22 LV9040

Bath/Bedroom Privacy Lock

Latchbolt retracted by knob/lever from either side unless outside is locked by inside thumbturn. Turning inside knob/lever or closing door unlocks outside knob/lever. To unlock from outside remove emergency button, insert emergency thumbturn (furnished) in access hole and rotate. Inside lever is always free for immediate egress.



L9044 LV9044

**Privacy With Coin Turn Outside** 

Latchbolt retracted by knob/lever from either side unless outside is locked by inside thumbturn or outside coin turn. Operating inside knob/lever, closing door, rotating inside thumbturn or rotating outside cointurn unlocks outside knob/lever. Specify per L283-056 for Torx® screws. Available with rose trim only. (Previously XL11-868)



L9440 LV9440 F19 Privacy With Deadbolt

Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by inside thumbturn. Throwing deadbolt locks outside knob/lever. Rotating inside knob/lever simultaneously retracts deadbolt and latchbolt, and unlocks outside knob/lever. To unlock from outside remove emergency button, insert emergency thumbturn in access hole and rotate. Inside liner is always free for immediate egress. [Previously XL11-761.]

Schlage ANSI



L9444 LV9444

Privacy with Deadbolt and Coin Turn Outside

Latchbolt retracted by knob/lever from either side. Deadbolt thrown or retracted by inside thumbturn or outside coin turn. Throwing deadbolt locks outside knob/lever. Rotating inside knob/lever simultaneously retracts deadbolt and latchbolt, and unlocks outside knob/lever. Rotating outside coin turn retracts deadbolt and unlocks outside knob/lever. Specify per L283-056 for Torx screws. Available with rose trim only. Inside lever is always free for immediate egress. (Previously XL11-868)



L0170 Half Dummy Trim

Knob/lever on one side fixed by mounting bar.



L0172 Full Dummy Trim

Knob/lever on both sides fixed by mounting bar.



Half Dummy Trim with Lock Case

Fixed knob/lever on one side inoperable. Includes lock case and armored front. Options same as L9176 below.



L9176

Full Dummy Trim with Lock Case\*
Fixed knob/lever on both sides. Includes

lock case and blank armor front. May be ordered with optional XL11-743 armored front with cutout to receive deadbolt.

\*In a double-door application where the dummy will be used as the strike order 10-091 Armored Front Strike separately.

## Lock Functions | Single Cylinder Non-Deadbolt Functions

Schlage ANSI



L9050 F04 LV9050

Office and Inner Entry Lock

Latchbolt retracted by knob/lever from either side unless outside is made inoperative by key outside or by turning inside thumbturn. When outside is locked, latchbolt is retracted by key outside or by knob/lever inside. Outside knob/lever remains locked until thumbturn is returned to vertical or unlocked by key. Auxiliary latch deadlocks latchbolt when door is closed. Inside liner is always free for immediate egress.



L9056 LV9056

L9050 with Automatic Unlocking

Latchbolt retracted by knob/lever from either side unless outside is made inoperative by key outside or by rotating inside thumbturn. Outside knob/lever unlocked by key outside, thumbturn or closing door. Rotating inside knob/lever simultaneously retracts latchbolt and unlocks outside knob/lever. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress.



L9070 F05 LV9070

Classroom Lock

Latchbolt retracted by knob/lever from either side unless outside is locked by key. Unlocked from outside by key. Inside knob/lever always free for immediate exit. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress.



L9076 LV9076 F06

Classroom Holdback Lock

Latchbolt retracted by knob/lever from either side unless outside is locked by key. When locked, latchbolt retracted by key outside or knob/lever inside. Auxiliary latch deadlocks latchbolt when door is closed. Depress inside knob/lever and turn key 360° for holdback feature. Inside lever is always free for immediate egress.



L9080 F0' LV9080

Storeroom Lock

Latchbolt retracted by key outside or by knob/lever inside. Outside knob/lever is always inoperative. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress.



L9080EL LV9080EL

Electrically Locked (Fail Safe)

Outside knob/lever continuously locked by 24V AC or DC. Latchbolt retracted by key outside or by knob/lever inside. Switch or power failure allows outside knob/lever to retract latchbolt. Auxiliary latch deadlocks latchbolt when door is closed. Inside knob/lever always free for immediate exit. Inside lever is always free for immediate egress.

Schlage ANSI



L9080EU LV9080EU

Electrically Unlocked (Fail Secure)

Outside knob/lever unlocked by 24V AC or DC. Latchbolt retracted by key outside or knob/lever inside. Auxiliary latch deadlocks latchbolt when door is closed. Inside lever is always free for immediate egress.



L9080EL-RX / LV9080EL-RX L9080EU-RX / LV9080EU-RX Request to Exit (RX) Electrified Lock

Same as L9080EL and L9080EU functions. In addition, a micro-switch positioned inside the lock case monitors the retractor crank, and is actuated when rotation of the inside or outside knob/levers rotates the retractor hub. The switch signals the use of that opening to security systems, allowing a non-disruptive means of immediate egress. Specify per L283-263 with L functions, specify L283-239 with LV functions. Inside lever is always free for immediate